




SCHÖNOX® HX 30

Thick layer levelling compound containing Hybrid Technology

Thanks to the hybrid technology, SCHÖNOX HX 30 is characterised by excellent processing properties and early readiness for covering. Particularly suitable for levelling thin-layer heating systems.



Product characteristics

- EMICODE EC 1^{PLUS}: very low emission
- pumpable
- self-levelling
- low tension/stress
- suitable for application on subfloor heating systems
- layer-thickness 5,0 to 50 mm
- suitable for castor wheels in accordance with EN 12 529
- for interior use

Applications

SCHÖNOX HX 30 is suitable for preparation of bonded screeds in layer thicknesses of 5 - 50 mm in:

- in residential and commercial areas.
- new and old buildings
- renovation work
- modernisation work
- Ideal in combination with thin-layer floor heating systems according to BVF guidelines.

SCHÖNOX HX 30 is suitable:

- under textile and elastic coverings
- multi-layer parquet elements - double layer or triple layer parquet - according to EN 13 489 (For full-surface levelling under parquet, layer thickness at least 5 mm. Only in combination with elastic SCHÖNOX parquet adhesives.)
- in interior areas.
- in combination with lamina panel heatings (warmwater or electrical), e.g. Uponor or Magnum

Substrates

SCHÖNOX HX 30 is suitable on:

- concrete
- cement and rapid cement screeds
- calcium sulphate based screeds
- mastic asphalt screeds (sanded) AS IC 10 and AS IC 15 according to EN 13 813, layer-thickness 5,0 to 15,0 mm
- magnesia screeds with mineral

aggregates

- old substrates such as ceramic tiles, natural stones and terrazzo
- old substrates with old water-resistant adhesive residues


Requirements of substrate

- Adequate strength, load bearing capacity, dimensional stability and permanent dryness.
- Free of residues which reduce adhesion, e.g. dust, dirt, oil, fat and loose particles.
- Separation layers, sinter layers, and other similar contamination should be removed through appropriate measures, such as sanding, brushing, abrasive blast cleaning, milling or thorough cleaning.
- Old, loose and weak levelling layers should be removed mechanically.
- Separate SCHÖNOX HX 30 from the vertical surfaces by installing the deformation tape SCHÖNOX RS 50.
- With subsequent installation of floor coverings, cement screeds are required to display a residual moisture reading of ≤ 2.0 CM-% (heating screeds ≤ 1.8 CM-%), calcium sulphate screeds should have a reading of ≤ 0.5 CM-% (heating screeds ≤ 0.3 CM-%).
- Layers of water-soluble adhesives, e.g. sulphite-waste-adhesives, are to be mechanically removed. Remaining adhesive residues should be primed with SCHÖNOX HP RAPID.
- Old water-resistant adhesives are to be mechanically removed as far as possible.
- Old floors, such as ceramic tiles are to be thoroughly cleaned and sanded.
- Rooms in buildings without a basement, are to be sealed against rising dampness in compliance with the standard.
- The requirements of the relevant valid standards, guidelines and data sheets apply.

Technical data

- Pot life: approx. 30 minutes at 20 °C
- Ready for foot traffic: after approx. 2 - 3 hours
- Ready for covering:
 - up to 5 mm after approx. 24 hours for all kinds of coverings
 - up to 10 mm after approx. 2 days for all kinds of coverings
 - up to 20 mm after approx. 7 days for all kinds of coverings
 - for increasing by further 10 mm, each with 5 days longer drying time
- Application temperature: not below 5 °C floor temperature
- Material consumption: approx. 1,8 kg/m²/mm
- Strength class: CA-C30-F7
- Reaction to fire: A1 / A1_{f1}

All values are approximate and are subject to climatic fluctuations.

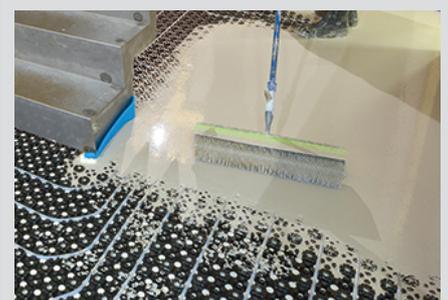

SCHÖNOX® HX 30

Priming

■ normal absorbent substrates such as:

- cement screeds
- rapid cement screeds
- concrete

prime with SCHÖNOX VD (1:3) or SCHÖNOX KH FIX.

■ non-absorbent, smooth, sound substrates such as:

- mastic asphalt screeds, insufficient sanded
- water-resistant adhesive residues (removed as far as possible)
- ceramic tiles (thoroughly cleaned and abraded)

prime with SCHÖNOX SHP or SCHÖNOX VD (neat).

■ calcium sulphate substrates such as:

- calcium sulphate screeds
- prime with SCHÖNOX SCHÖNOX VD FIX or SCHÖNOX SCHÖNOX VD (1:1).

■ magnesia screeds (not xylolite):

prime with SCHÖNOX SHP.

For layer-thickness exceeding 10 mm on substrates sensitive to moisture (e.g. calcium sulphate screeds, wooden substrates etc.) we recommend priming with a reaction resin based primer e.g. SCHÖNOX HP RAPID.

Mixing ratio

- For 25,0 kg SCHÖNOX HX 30 approx. 4,25 l water

Recommended method of working

- The ideal working temperature is 15 °C floor temperature, 18 °C air temperature, ≤ 65% relative humidity.
- Using a clean receptacle, add SCHÖNOX HX 30 to cold clean water to form a homogeneous mixture. Use of a disc stirring rod or a pump like Using a clean receptacle, add SCHÖNOX HX 30 to cold clean water to form a homogeneous mixture. Use of a disc stirring rod or a pump like inotec, Putzmeister, Wagner, PFT or other suitable pumps, is recommended. In case of interruption of work pump and hoses necessarily should be cleaned immediately

- Spread SCHÖNOX HX 30 using a suitable tool (surface blade, trowel) and as needed ventilate using a spike roller.

- Edge and movement joints should be taken over.

- In the case of higher layer-thickness, contact with vertical structures should be avoided by putting in a perimeter isolating strip.

- Carry out preparatory work - such as filling joints, evening out hollows and unevenness - using the sturdy repair mortar SCHÖNOX RM or SCHÖNOX RR.

- If a second layer of levelling compound is to be applied, the first levelling compound layer should be primed with SCHÖNOX VD (1:1) or SCHÖNOX KH FIX when dry. The maximum layer thickness may not be exceeded in case of two-layer application. The second layer may not exceed the layer thickness of the first.

- Protect curing SCHÖNOX HX 30 levelling layers from high ambient temperatures, direct sunlight and draughts.

- If grinding of SCHÖNOX HX 30 is necessary use a paper or net with grit-size ≥ 80.

- Contact to metal like water-bearing pipes must be avoided (e.g. sealing of pipe penetrations), because especially galvanised steel pipes have no sufficient corrosion protection.

- Clean tools in water immediately after use.

Packaging

- 25.0 kg paper sack

Storage

- Store SCHÖNOX HX 30 in cool, dry conditions.
- Storage life of 1 year (in closed packaging).
- Opened packages should be closed immediately and used up as soon as possible.

Disposal

- Empty packaging completely and dispose of in accordance with regulations

- Material leftovers may be disposed of dried up or hardened as commercial solid waste or domestic waste.

- For the disposal of product residues, waste water and containers with adherent product residues please follow the local governmental regulations.

- Do not empty into drains, waters or soil.

EMICODE

- EC 1^{PLUS}: very low emission

GISCODE

- CP3 - levelling compounds based on calcium sulphate, calcium oxide content > 3%

EPD - Self-declaration

- Sika Deutschland GmbH declares that the product fulfills the criteria of one Environmental Product Declaration acc. to ISO 14025 and EN 15804

- Declaration available for download at www.schoenox.com at SCHÖNOX HX 30

Instructions

- All information applies to standard conditions and relates to the non-extended levelling compound.

- The TKB-data sheet "Technische Beschreibung und Verarbeitung von Bodenspachtelmassen" should be followed.

- Please follow the relevant product data sheets when using complementary products. If in doubt, we recommend obtaining further information from the manufacturer.

SCHÖNOX® HX 30

The applicable recommendations, guidelines, DIN regulations and safety data sheets are to be observed, together with the recognised architectural and engineering regulations. We guarantee that our products leave the factory in perfect condition. While our recommendations for use are based on tests and practical experience, they can only provide general guidance without any assurance as to product characteristics, since we have no influence over the conditions on site, the execution of the work or the method of processing. This product data sheet supersedes all previous editions.



The Sika management system is certified to ISO 9001 and 14001 by SGS

Sika Deutschland GmbH
Subsidiary Rosendahl
 P.O. Box 11 40
 D-48713 Rosendahl / Germany
 Phone +49 (0) 2547-910-0
 Fax +49 (0) 2547-910-101
 E-mail: info@schoenox.de
www.schoenox.com