




# SCHÖNOX® HS 10

**Rapid setting, self leveling hybrid floor leveling compound with Hybrid Active Dry Technology**

Combines the advantages of a low tension calciumsulphate based leveling compound with the fast drying of cementitious systems. SCHÖNOX HS 10 guarantees very fast, climate-independent drying and early readiness for covering, while at the same time being very easy to apply.



## Product characteristics

- EMICODE EC 1<sup>PLUS</sup>: very low emission
- - 30 % CO<sub>2</sub> Emissions
- RAL UZ 113: Environment-friendly, because very low-emission
- quickly ready for covering through high water binding capacity
- fast development of strength
- dust reduced
- for interior use
- self-levelling
- high level of hardness and strength
- very smooth application
- suitable for application on subfloor heating systems
- ideal in combination with Sika coatings
- synthetic resin-modified
- layer-thickness 1,0 to 20 mm
- pumpable
- low tension/stress
- suitable for castor wheels loading with layer-thickness more than 1,0 mm according to EN 12 529
- low porosity surface

## Applications

**SCHÖNOX HS 10 is suitable for filling, smoothing, evening and levelling of substrates:**

- in residential, commercial and light industrial areas, e.g. hospitals, high-traffic shopping centres
- under textile and elastic coverings as well as parquet (For full-surface levelling under parquet, layer thickness at least 2 mm.)
- for full-surface levelling under sealings and coatings (Note the system design in combination with Sika coatings)
- in interior areas.

## Substrates

**SCHÖNOX HS 10 is suitable for filling, smoothing, evening and levelling of:**

- calcium sulphate based screeds

- mastic asphalt screeds (completely sanded) AS IC 10 and AS IC 15 according to EN 13813
- dry screeds
- magnesia screeds
- xylolite screeds
- old substrates such as ceramic tiles, natural stones and terrazzo
- old substrates with old water-resistant adhesive residues
- OSB boards (class 3 - 4)
- particle boards (P4 - P7)
- cement and rapid cement screeds
- concrete

## Requirements of substrate

- Adequate strength, load bearing capacity, dimensional stability and permanent dryness.
- Free of residues which reduce adhesion, e.g. dust, dirt, oil, fat and loose particles.
- Surface treatments or any "friable" areas of the subfloor must be mechanically removed and the subfloor repaired with SCHÖNOX leveling compounds as required.
- Old, loose and weak levelling layers should be removed mechanically.
- With subsequent installation of floor coverings, cement screeds are required to display a residual moisture reading of  $\leq 2.0$  CM-% (heating screeds  $\leq 1.8$  CM-%), calcium sulphate screeds should have a reading of  $\leq 0.5$  CM-% (heating screeds  $\leq 0.3$  CM-%).
- Layers of water-soluble adhesives, e.g. sulphite-waste-adhesives, are to be mechanically removed. Remaining adhesive residues should be primed with SCHÖNOX HP RAPID.
- Old water-resistant adhesives are to be mechanically removed as far as possible.
- Old floors, such as ceramic tiles are to be thoroughly cleaned and sanded.
- Rooms in buildings without a basement, are to be sealed against rising

## Technical data

- Pot life: approx. 30 minutes at 20 °C
- Ready for foot traffic: after approx. 2 hours
- Ready for covering:
  - up to 10 mm after approx. 6 hours for all kinds of coverings
  - up to 20 mm after approx. 12 hours for all kinds of coverings
- Application temperature: not below 5 °C floor temperature
- Material consumption: approx. 1,6 kg/m<sup>2</sup>/mm
- Strength class: CA-C40-F10
- Reaction to fire: A1 / A1<sub>f1</sub>



# SCHÖNOX® HS 10

dampness in compliance with the standard.

- The requirements of the relevant valid standards, guidelines and data sheets apply.

## Priming

### ■ normal absorbent substrates such as:

- cement screeds
- rapid cement screeds
- concrete

prime with SCHÖNOX VD (1:3) or SCHÖNOX KH FIX.

### ■ non-absorbent, smooth, sound substrates such as:

- mastic asphalt screeds
- ceramic tiles (thoroughly cleaned and abraded)
- water-resistant adhesive residues (removed as far as possible)

prime with SCHÖNOX SHP or SCHÖNOX VD (neat).

### ■ calcium sulphate substrates such as:

- calcium sulphate screeds
- dry screeds

prime with SCHÖNOX VD FIX or SCHÖNOX VD (1:1).

### ■ magnesia screeds (not xylolite):

prime with SCHÖNOX SHP.

### ■ xylolite screeds:

prime with SCHÖNOX HP RAPID.

### ■ Wooden substrates like e.g.:

- Chipboard or OSB
- protect against moisture with SCHÖNOX VD (neat)(drying time 2 hours).

## Mixing ratio

- For 25,0 kg SCHÖNOX HS 10 approx. 5,5 l water

## Recommended method of working

- The ideal working temperature is 15 °C floor temperature, 18 °C air temperature, ≤ 65 % relative humidity.
- Using a clean receptacle, add SCHÖNOX HS 10 to cold clean water to form a homogeneous mixture. Use of a mixer with disc stirring rod is recommended. After a short maturing time, mix again thoroughly. Then pour out the levelling compound and spread

using a smoothing trowel. Even surfaces are easily achieved with the SCHÖNOX SCHWEDENRAKEL. With the use of the SCHÖNOX SCHWEDENRAKEL it is possible to achieve an even surface without difficulties. It is usually not necessary to remove trowelling defects or to level more than once.

- In the case of higher layer-thickness, contact with vertical structures should be avoided by putting in an perimeter isolating strip.

- If a second layer of levelling compound is to be applied, the first levelling compound layer should be primed with SCHÖNOX VD (1:1) or SCHÖNOX KH FIX when dry. The maximum layer thickness may not be exceeded in case of two-layer application. The second layer may not exceed the layer thickness of the first.

- Carry out preparatory work - such as filling joints, evening out hollows and unevenness - using the sturdy repair mortar SCHÖNOX RM or SCHÖNOX RR.

- Protect curing SCHÖNOX HS 10 levelling layers from high ambient temperatures, direct sunlight and draughts.

- If grinding of SCHÖNOX HS 10 is necessary use a paper or net with grit-size ≥ 80.

- Contact to metal like water-bearing pipes must be avoided (e.g. sealing of pipe penetrations), because especially galvanised steel pipes have no sufficient corrosion protection.

- Clean tools in water immediately after use.

## Packaging

- 25.0 kg paper sack

## Storage

- Store SCHÖNOX HS 10 in cool, dry conditions.
- Storage life of 1 year.
- Opened packages should be closed immediately and used up as soon as possible.

## Disposal

- Empty packaging completely and dispose of in accordance with regulations

- For the disposal of product residues, waste water and containers with adherent product residues please follow the local governmental regulations.

- Do not empty into drains, waters or soil.

## EMICODE

- EC 1<sup>PLUS</sup>: very low emission

## GISCODE

- CP3 - levelling compounds based on calcium sulphate, calcium oxide content > 3%

## EPD - Self-declaration

- Sika Deutschland GmbH declares that the product fulfills the criteria of one Environmental Product Declaration acc. to ISO 14025 and EN 15804

- Declaration available for download at [www.schoenox.com](http://www.schoenox.com) at SCHÖNOX HS 10

## Instructions

- All information applies to standard conditions and relates to the non-extended levelling compound.

- Please follow the relevant product data sheets when using complementary products. If in doubt, we recommend obtaining further information from the manufacturer.

- The TKB-data sheet "Technische Beschreibung und Verarbeitung von Bodenspachtelmassen" should be followed.

- Composition:

- Calcium sulphate
- Mineral fillers
- Cement (Chromate reduced)
- Redispersed copolymer powder
- Additives

- Keep out of the reach of children.

- Avoid eating, drinking and smoking while working with the product.

- Insure a good ventilation during application and drying.

- Wear suitable protective gloves.


- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

- Protect your hands with waterproof, robust gloves.

# SCHÖNOX® HS 10

- Wear long trousers.
- Avoid longer skin contact.
- In case of contact with skin, rinse immediately with plenty of water.
- The longer fresh adhesive or laying materials remain on skin, the greater the risk of serious skin damage.
- Keep away children from fresh adhesive and laying material.

The applicable recommendations, guidelines, DIN regulations and safety data sheets are to be observed, together with the recognised architectural and engineering regulations. We guarantee that our products leave the factory in perfect condition. While our recommendations for use are based on tests and practical experience, they can only provide general guidance without any assurance as to product characteristics, since we have no influence over the conditions on site, the execution of the work or the method of processing. This product data sheet supersedes all previous editions.

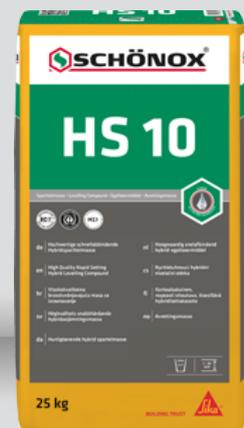

The Sika management system is certified to ISO 9001 and 14001 by SGS

**Sika Deutschland GmbH**  
**Subsidiary Rosendahl**  
 P.O. Box 11 40  
 D-48713 Rosendahl / Germany  
 Phone +49 (0) 2547-910-0  
 Fax +49 (0) 2547-910-101  
 E-mail: [info@schoenox.de](mailto:info@schoenox.de)  
[www.schoenox.com](http://www.schoenox.com)