

PRODUCT DATA SHEET

Sarnafil® T Notüberlauf AF Rechteckig

Molded component for horizontal roof drainage

DESCRIPTION

Sarnafil® T Notüberlauf AF Rechteckig is a prefabricated molded component designed for horizontal emergency drainage through parapet walls on flat roofs.

FEATURES

- With welded connection sleeve for easy connection
- UV-stabilized
- Cold impact resistant

USES

For horizontal emergency drainage through parapet walls on Sarnafil® T flat roofs.

PRODUCT INFORMATION

Composition	FPO/PP	
Packaging	Depending on the order quantity and product size, the products are packaged on pallets or in cartons.	
Colour	Ground body	Silk grey, similar to RAL 7044
	Connection sleeve	Sarnafil TS 77-18 in beige Sarnafil TS 77-18 in RAL 7040
Shelf life	The product retains its properties if stored properly.	
Storage conditions	The Product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to packaging.	


Dimensions

Internal (w x z)	b	h	L
120 x 60	300	240	300, 600
180 x 80	360	260	300, 600
300 x 80	480	260	300, 600
300 x 100	480	280	300, 600
500 x 100	680	280	300, 600
750 x 100	930	280	300, 600
1000 x 100	1180	280	300, 600

All dimensions in millimetres

Connection sleeve for	AB	AL
120 x 60	500	440
180 x 80	560	460
300 x 80	680	460
300 x 100	680	480
500 x 100	880	480
750 x 100	1130	480
1000 x 100	1380	480

All dimensions in millimetres

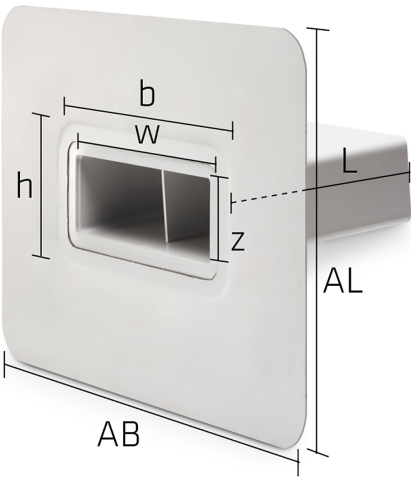

TECHNICAL INFORMATION

Drain flow capacity	Internal (w x z)	accumulation height 35 mm	accumulation height 65 mm
	120 x 60 mm	1.30 litre/sec.	3.50 litre/sec.
	180 x 80 mm	1.90 litre/sec.	5.00 litre/sec.
	300 x 80 mm	3.00 litre/sec.	7.80 litre/sec.
	300 x 100 mm	3.00 litre/sec.	7.80 litre/sec.
	500 x 100 mm	5.50 litre/sec.	13.40 litre/sec.
	750 x 100 mm	7.50 litre/sec.	19.20 litre/sec.
	1000 x 100 mm	12.60 litre/sec.	29.40 litre/sec.

SYSTEM INFORMATION

System

Compatible with Sarnafil® AT and Sarnafil® T roof waterproofing membranes.

BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

APPLICATION INSTRUCTIONS

APPLICATION

The Sarnafil® T Notüberlauf AF Rechteckig must be securely fastened to the substructure.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Deutschland CH AG & Co KG

Kornwestheimer Straße 103 - 107

D - 70439 Stuttgart

Tel.: +49 711 8009-0

Fax: +49 711 8009-321

info@de.sika.com

www.sika.de

PRODUCT DATA SHEET

Sarnafil® T Notüberlauf AF Rechteckig

November 2025, Version 01.01

020945032050245918

SarnafilTNotberlaufAFRechteckig-en-DE-(11-2025)-1-1.pdf