

PRODUCT DATA SHEET

Sarnabar® Connection Clip

Injection moulded connection clip for Sarnabar® rails

DESCRIPTION

The Sarnabar® Connection Clip is made of Polyamide (PA 6) by injection moulding procedure.

USES

The Sarnabar® Connection Clip is used to connect the standard Sarnabar® fastening rail.

FEATURES

- Easy and fast connection of the Sarnabar® rails
- 3 in 1 product (connection, protection and spacer)
- Makes the use of a butt strap obsolete
- Ease of application due to the click function



PRODUCT INFORMATION

Composition	Polyamide (PA 6)
Packaging	The product is packed in a plastic pail with 350 pieces content and or a plastic bag with 50 pieces content.
Appearance and colour	<u>Colour</u> grey (nearest to RAL 7046)
Shelf life	The product retains its properties if stored properly.
Storage conditions	Store under dry conditions.
Length	80 mm
Width	34.5 mm
Height	11 mm

APPLICATION INFORMATION

Ambient air temperature -20 °C min. / +60 °C max.

Substrate temperature -30 °C min. / +60 °C max.

SYSTEM INFORMATION

System structure Only suitable to connect the Sika Sarnabar® rail.


BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

APPLICATION INSTRUCTIONS

APPLICATION METHOD / TOOLS

According to the valid installation instructions for Sarnafil® and Sikaplan®. The Sarnabar® Connection Clip cannot absorb high forces. As a result the first fastening must be set at the end of the Sarnabar® rail next to the connection clip. The Sarnabar® rail shall be clicked (5–10mm beside the middle web) into the Connection Clip and then pushed to the stopper inside the middle web.

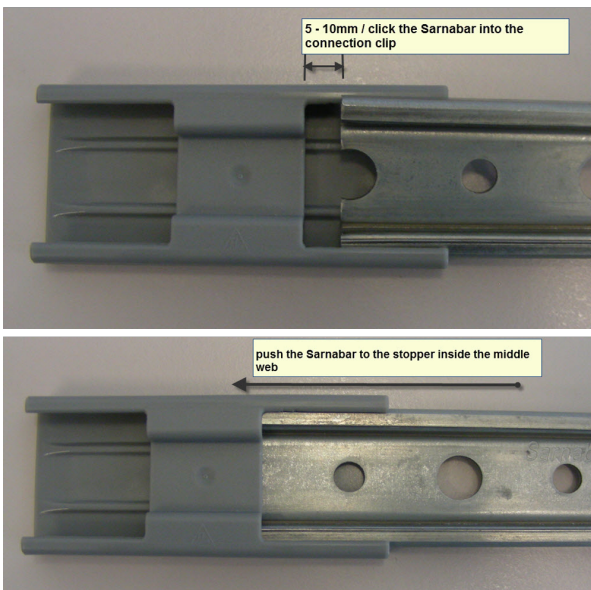

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Deutschland CH AG & Co KG
Kornwestheimer Straße 103 - 107
D - 70439 Stuttgart
Tel.: +49 711 8009-0
Fax: +49 711 8009-321
info@de.sika.com
www.sika.de

PRODUCT DATA SHEET
Sarnabar® Connection Clip
April 2026, Version 01.01
02094505110000019

SarnabarConnectionClip-en-DE-(04-2026)-1-1.pdf