

PRODUCT DATA SHEET

Sikaflex®-650 VG-1

Purform® technology based primerless to paint direct glazing adhesive

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base	Polyurethane
Color (CQP001-1)	Black
Cure mechanism	Moisture-curing
Density (uncured)	1.21 kg/l
Non-sag properties (CQP061-1)	Good
Application temperature	adhesive 40 – 50 °C ambient 15 – 35 °C
Skin time (CQP019-4)	50 minutes ^A
Curing speed (CQP049-1)	at 24 hours 3 mm ^A
Tensile strength (CQP036-1 / ISO 527)	10 MPa
Elongation at break (CQP036-1 / ISO 527)	400 %
Tear propagation resistance (CQP045-1 / ISO 34)	14 N/mm
Tensile lap-shear strength (CQP046-1 / ISO 4587)	9 MPa
Shear modulus (CQP081-1)	at 10 % 3.1 MPa
Shelf life (CQP016-1)	6 months ^B

CQP = Corporate Quality Procedure

^A) 23 °C / 50 % r.h.^B) stored below 25 °C in unopened container
DESCRIPTION

Sikaflex®-650 VG-1 is based on Purform®, a polyurethane with less than 0.1% monomeric diisocyanate for better health protection and occupational safety. Sikaflex®-650 VG-1 is an adhesive system specifically designed for the automotive industry.

It is suitable for assembly bonding and direct glazing applications.

Sikaflex®-650 VG-1 can be accelerated with Sika's Booster and PowerCure system.

PRODUCT BENEFITS

- Less than 0.1 % monomeric diisocyanate for better health protection and occupational safety
- 1-component application
- Primerless to paint
- High modulus
- PVC- and solvent free
- Short cut-off string
- Good working characteristics

AREAS OF APPLICATION

Sikaflex®-650 VG-1 is suitable for automated and manual direct glazing as well as permanent elastic bonding of components in the automotive industry. Sikaflex®-650 VG-1 bonds well to numerous substrates. Common substrates are pre-treated ceramic frits and glasses with corresponding UV protection as well as cleaned e-coated and painted surfaces.

This product is suitable for experienced professional users only. Tests with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

PRODUCT DATA SHEET

Sikaflex®-650 VG-1

Version 02.01 (09 - 2026), en_DEAUTO

012001216508001000

CURE MECHANISM

Sikaflex®-650 VG-1 cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower.

CHEMICAL RESISTANCE

Sikaflex®-650 VG-1 is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, ethanol, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

METHOD OF APPLICATION

Surface preparation

Surfaces must be clean, dry and free from grease, oil, dust and contaminants.

Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. All pre-treatment steps must be confirmed by preliminary tests on original substrates considering specific conditions in the assembly process.

Application

Sikaflex®-650 VG-1 needs to be processed with an adequate dispensing system. The mixer type must be respected (see table Typical Product Data).

Sikaflex®-650 VG-1 can be applied between 15 °C and 35 °C (ambient) but changes in reactivity and application properties have to be considered. To ensure a uniform thickness of the bondline it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

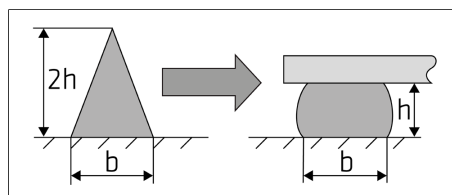


Figure 1: Recommended bead configuration

The open time is significantly shorter in hot and humid climate. The parts must always be joined within the open time. As a rule of thumb, a change of + 10 °C reduces the open time by half.

For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry.

Removal

Uncured Sikaflex®-650 VG-1 may be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- General Guideline
Bonding and Sealing with 1-component Sikaflex®

PACKAGING INFORMATION

Drum	195 l
------	-------

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

DISCLAIMER

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

PRODUCT DATA SHEET

Sikaflex®-650 VG-1
Version 02.01 (09 - 2026),
en_DEAUTO
012001216508001000

Sika Automotive Deutschland GmbH
Flinschstrasse 10-16
60388 Frankfurt am Main
www.sikaautomotive.com

