

PRODUCT DATA SHEET

SikaBiresin® CR201

Composite resin system for filament winding process with T_g up to 201 °C

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Properties	Component A SikaBiresin® CR201	Component B SikaBiresin® CH141	Component C SikaBiresin® CA144
Chemical base	Epoxy resin	Anhydride hardener	Amine accelerator
Color	Transparent	Yellowish	Yellowish
Density	1.17 kg/l cured 1.2 kg/l	1.20 kg/l	1.03 kg/l
Mixing ratio	by weight by volume	115 112	0.5 – 2 0.6 – 2.3
Viscosity (CQP029-4)	200 mPa·s mixed 100 mPa·s	10 mPa·s	10 mPa·s
Pot life (CQP021-3 / Gel Timer TECAM)	24 hours		
Curing conditions	1 h at 100 °C + 6 h at 180 °C		
Tensile strength (CQP036-2 / ISO 527)	50 MPa		
Tensile modulus (CQP036-2 / ISO 527)	2850 MPa		
Tensile elongation (CQP036-2 / ISO 527)	1.9 %		
Flexural strength (CQP027-2 / ISO 178)	115 MPa		
Flexural modulus (CQP027-2 / ISO 178)	3150 MPa		
Compressive strength (CQP028-5 / ISO 604)	150 MPa		
Shore D hardness (CQP023-1 / ISO 868)	88		
Impact resistance (CQP038-2 / ISO 179)	8 kJ/m ²		
Glass transition temperature (CQP301-5 / ISO 11357)	201 °C		
Heat deflection temperature (CQP030-1 / ISO 75A)	188 °C		
Heat deflection temperature (CQP030-1 / ISO 75B)	193 °C		
Heat deflection temperature (CQP030-1 / ISO 75C)	172 °C		
Shelf life	24 months	12 months	12 months

CQP = Corporate Quality Procedure

DESCRIPTION

SikaBiresin® CR201 is an accelerated anhydride cured epoxy resin system with thermal properties up to 201 °C.

It is especially suited for the production of high performance composites with very high heat resistance.

PRODUCT BENEFITS

- High thermal resistance
- Very long pot life
- Low viscosity
- Adjustability of reactivity by accelerator (C)

AREAS OF APPLICATION

SikaBiresin® CR201 is especially suited to the filament winding process due to its low viscosity, good fiber wetting capabilities and very long pot life.

This product is suitable for experienced professional users only. Tests under actual processing conditions and with additional materials such as fibers and release agents must be performed to proof material compatibility.

METHOD OF APPLICATION

Mixing process

The components must be mixed homogeneously by using the common mixing techniques for composite resins. To get full performance, the indicated mixing ratio must be respected precisely.

The temperature of the mixture has a direct influence on the viscosity and pot life of the resin system.

Note: Release agents or other additives can influence the material properties and performance.

Application

The data for viscosity and potlife in this Product Data Sheet is produced at 25 °C. Consider the change in processing parameters if the resin system is processed at different temperatures. The curing must be performed at temperature ≥ 80 °C. Subsequent postcuring is recommended.

Information regarding viscosity development and reaction time depending on the amount of accelerator are shown in the diagrams below.

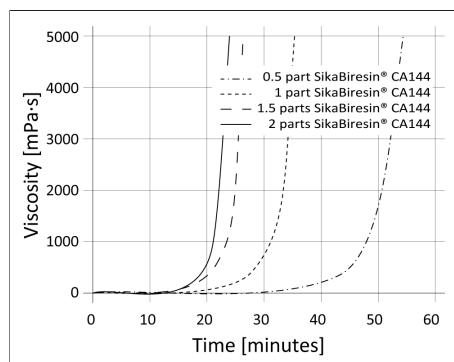


Diagram 1: Viscosity development at 100 °C depending on accelerator concentration

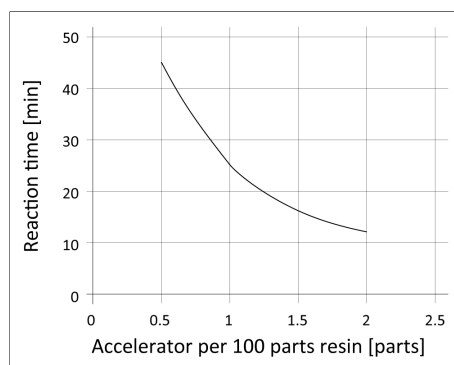


Diagram 2: Reaction time at 100 °C depending on accelerator concentration, Gelnorm (CQP021-5 / ISO 9396)

Prior to application, check all components for crystallization. The crystallization process can be reversed by heating the product to 60 °C – 70 °C until the crystals are no longer visible.

Containers must be closed tightly immediately after each use to prevent moisture ingress.

Postcuring

Mechanical and thermal values of the laminated part depend on various factors, such as laminate thickness, fiber volume content, reactivity of the resin system as well as chosen curing cycle.

For information concerning suitable curing cycles consult the General Guideline for Composite Resins.

Removal

Uncured SikaBiresin® CR201 can be removed from tools and equipment with Sika® Reinigungsmittel 5 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin shall be washed immediately using industrial hand cleaner and water.

Do not use solvents on skin.

STORAGE CONDITIONS

All components must be stored between 15 °C – 30 °C.

Prior to use check the material for homogeneity and crystallization and make sure to temper it to processing temperature.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- General Guideline
For Composite Resins

PACKAGING INFORMATION

SikaBiresin® CR201 (A)

Pail	10 kg
Drum	200 kg
IBC	1000 kg

SikaBiresin® CH141 (B)

Pail	9 kg
Drum	220 kg
IBC	1100 kg

SikaBiresin® CA144 (C)

Can	0.2 kg
Pail	10 kg

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

DISCLAIMER

The information, and, in particular, the recommendations relating to the application and enduse of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

PRODUCT DATA SHEET

SikaBiresin® CR201
Version 01.01 (09 - 2025), en_DE
013122032010001000

Sika Deutschland CH AG & Co KG
Industry
Stuttgarter Straße 139
72574 Bad Urach
Tel. +49 7125 940-7692
verkauf.industry@de.sika.com
www.sika.de

