

PRODUCT DATA SHEET

SikaMelt[®]-700

Polyurethane hotmelt adhesive for headlamp assembly

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base	Polyurethane
Color (CQP001-1)	Black
Cure mechanism	Moisture curing
Density (uncured)	1.16 kg/l
Viscosity (by Brookfield)	at 130 °C 30 000 mPa·s
Softening temperature (CQP538-5)	77 °C
Application temperature	105 – 140 °C short term max. 1 h 150 °C ^A
Curing time (CQP049-3)	See diagram 1
Green strength (CQP557-1)	0.8 MPa
Tensile strength (CQP036-3)	10 MPa
Shelf life	9 months ^B

CQP = Corporate Quality Procedure

^{A)} only valid for nozzle^{B)} Storage below 25 °C
DESCRIPTION

SikaMelt[®]-700 is a versatile, 1-component reactive polyurethane hot melt adhesive for assembly bonding. It cures on exposure to atmospheric humidity.

PRODUCT BENEFITS

- Low fogging
- 1-component formulation
- Fast strength build-up
- Good application properties
- Plasticizer free
- Solvent free
- GMW 16506 listed

AREAS OF APPLICATION

SikaMelt[®]-700 is suitable for permanent bonding of polar plastics like PC and PMMA. Non polar plastics like PP can be bonded after proper physical pretreatment.

The fast strength build up rate of this product can typically allow a headlamp leak test to be performed 2 – 10 minutes after the bonding process. The duration of this time-span depends significantly on several factors, such as the size of the headlamp, the test pressure, etc.

This product is suitable for experienced professional users only. Tests with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

CURE MECHANISM

SikaMelt®-700 cures by reaction with atmospheric moisture. At low temperatures the water content in the air is lower, which will result in a lower curing speed (see diagram 1). When bonding hydrophobic (e.g. PP) and/or moisture impermeable substrates a significantly longer curing time has to be taken into account.

This applies especially on assembly applications with an adhesive thickness > 100 µm.

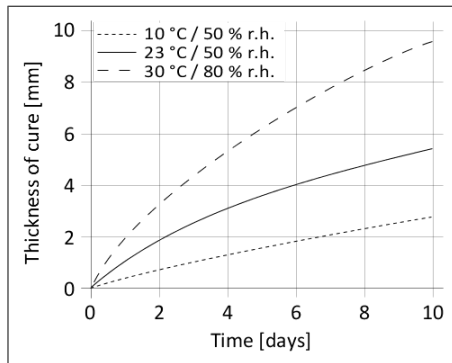


Diagram 1: Curing speed SikaMelt®-700

CHEMICAL RESISTANCE

SikaMelt®-700 is resistant to aqueous surfactant, weak alkaline/acids solutions and temporarily resistant to fuels, solvents and mineral oils.

The chemical resistance is influenced by several factors such as chemical composition, concentration, period of exposure and temperature. Therefore a project related testing in case of chemical or thermal exposure is required.

METHOD OF APPLICATION

Surface preparation

Surfaces must be clean, dry and free from grease, oil and dust.

Based on the surface and type of material, a physical or chemical pre-treatment might be required. Type of pre-treatment must be determined by preliminary tests.

For metals best results are achieved, if substrates are heated up between 40 °C and 60 °C prior the assembly process.

Application

With adequate processing equipment SikaMelt®-700 can be applied as dot or bead application. For automated applications a suitable filter system is required.

During breaks SikaMelt®-700 is to be processed as follows:

For breaks ≥ 1 h the heating needs to be lowered to 80 °C and for breaks ≥ 4 h the heating needs to be switched off.

To ensure a constant quality during the whole production process it is mandatory to protect the adhesive in the melting tank with nitrogen, carbon dioxide or dried air (to avoid possible reaction of the product with humidity). At breaks or shut downs dip nozzle in dried oil in order to prevent curing of the adhesive (avoid blockage).

For advice on selecting and setting up suitable processing equipment contact the System Engineering Department of Sika Industry.

Removal

Equipment and application tools can be cleaned with SikaMelt®-009. Cured material can be swelled with SikaMelt®-001 and needs to be removed mechanically (see also cleaning instruction).

Uncured SikaMelt®-700 may be removed from tools and equipment with Sika® Remover-208 or another suitable solvent.

Hands and exposed skin have to be washed immediately using Sika® Cleaner-350H or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
 - Cleaning Instruction
- For SikaMelt® PUR reactive hot melt equipment

PACKAGING INFORMATION

Pail	20 kg
Drum	200 kg

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

DISCLAIMER

The information, and, in particular, the recommendations relating to the application and enduse of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

PRODUCT DATA SHEET

SikaMelt®-700
Version 04.03 (05 - 2023),
en_DEAUTO
013409707000001000

Sika Automotive Deutschland GmbH

Flinschstrasse 10-16
60388 Frankfurt am Main
www.sikaautomotive.com

